




HOW IT WORKS

Proven Performance

The DrySpace deck drainage system is available for decks with 12-in., 16-in., and 24-in. on-center joist spacing. For the most popular deck construction with 16-in. on-center joist spacing, DrySpace utilizes just three solid extruded vinyl profiles for maximum strength, durability, and weather resistance.

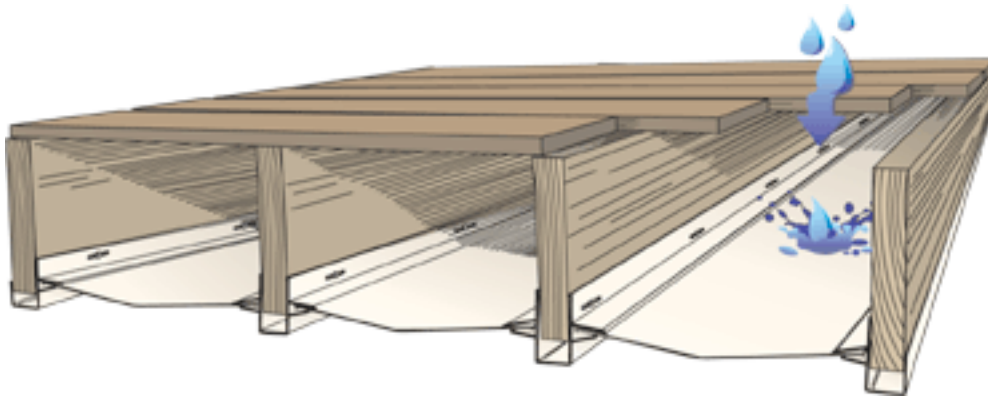

- A joist cover with integral V-Panel installation brackets.
- V-panel
- Ledger F-Bracket

The 3-piece system is attached to the joists under the deck at an overall downward pitch of 2-in. from the house to the front of the deck to ensure that all of the water coming through the deck gaps is channeled away from the house.

An optional gutter and downspout (not included) can be installed with DrySpace to collect water from the downward sloping V-Panels suspended by the system between each deck joist. Installation of the optional gutter and downspout is recommended to ensure that all water is drained away from the new usable space that has been created under the deck.